

Access & Power Integration

## **T1KE34DV**

4 Door Kit with PTC Outputs

Fully assembled kit includes:

- Trove1 enclosure with TLU1 backplane
- One (1) AL600XB220 - Power Supply/Charger
- One (1) ACM4CB - PTC Access Power Controller

## **T1KE38DV**

8 Door Kit with PTC Outputs

Fully assembled kit includes:

- Trove1 enclosure with TLU1 backplane
- One (1) AL600XB220 - Power Supply/Charger
- Two (2) ACM4CB - PTC Access Power Controllers

## **T2KE3316DV**

16 Door Kit with PTC Outputs

Fully assembled kit includes:

- Trove2 enclosure with TLU2 backplane
- Two (2) AL600XB220 - Power Supply/Charger
- Two (2) ACM8CB - PTC Access Power Controllers

# **Installation Guide**

All components of this Trove kit are UL Listed sub-assemblies.

Please refer to the included corresponding Sub-Assembly Installation Guides for further information.



**More than just power.™**

All registered trademarks are property of their respective owners.

Rev. 122221

Installing Company: \_\_\_\_\_ Service Rep. Name: \_\_\_\_\_

Address: \_\_\_\_\_ Phone #: \_\_\_\_\_

## Overview:

Altronix Trove Kisi kits are pre-assembled and consists of Trove1LU1 or Trove2LU2 enclosure/backplane with factory installed Altronix power supply/charger and sub-assemblies. Trove Kisi kits also accommodates up to four (4) Kisi Pro Controllers for up to sixteen (16) doors in a single enclosure.


## Configuration Chart:

| Altronix Model Number | Power Supply Board Input Fuse Rating | Power Supply Board Battery Fuse Rating | 220VAC 50/60Hz Input Current (A) | Maximum Supply Current for Main Output on Power Supply board and ACM4CB/ACM8CB Access Power Controllers' outputs | Nominal DC Output Voltage |                    | Fail-Safe/ Fail-Secure Outputs | ACM4CB/ ACM8CB Board Input Fuse Rating | ACM4CB/ ACM8CB Board Output PTC Rating |
|-----------------------|--------------------------------------|--|----------------------------------|--|---------------------------|--------------------|--------------------------------|--|--|
|                       |                                      |  |                                  |  | [DC]                      | [Aux]              |                                |  |  |
|                       |                                      |  |                                  |  | Output Range (VDC)        | Output Range (VDC) |                                |  |  |
| T1KE34DV              | 5A/<br>250V                          | 10A/<br>32V                            | 1.5                              | 24VDC @ 6A   | 20.17-<br>26.4            | 20.28-<br>26.4     | 4                              | 10A/<br>250V                           | 2A                                     |
| T1KE38DV              |                                      |  |                                  |  |                           |                    | 8                              |  |  |
| T2KE3316DV            |                                      |  |                                  |  |                           |                    | 16                             |  |  |

## Installation Instructions:

Wiring methods shall be in accordance with the National Electrical Code/NFPA 70/ANSI, and with all local codes and authorities having jurisdiction. Product is intended for indoor use only.

1. Remove backplane from enclosure. Do not discard hardware.
2. Mark and predrill holes in the wall to line up with the top two/three keyholes in the enclosure. Install two/three upper fasteners and screws in the wall with the screw heads protruding. Place the enclosure's upper keyholes over the two/three upper screws, level and secure. Mark the position of the lower two/three holes. Remove the enclosure. Drill the lower holes and install the two/three fasteners. Place the enclosure's upper keyholes over the two/three upper screws. Install the two/three lower screws and make sure to tighten all screws refer to *pages 6-7*.
3. Mount included UL Listed tamper switch (Altronix Model TS112 or equivalent) in desired location, opposite hinge. Slide the tamper switch bracket onto the edge of the enclosure, approximately 2" from the right side (*Fig. 1, pg. 2*). Connect tamper switch wiring to the Access Control Panel input or the appropriate UL Listed reporting device. To activate alarm signal open the door of the enclosure.
4. Mount Kisi Pro Controllers to TLU1 or TLU2 backplane, refer to *pages 3-5*.
5. Refer to the *ULXB Power Supply/Charger Installation Guide* for AL600XB220 and corresponding *Sub-Assembly Installation Guides* for ACM4CB/ACM8CB for further installation instructions.

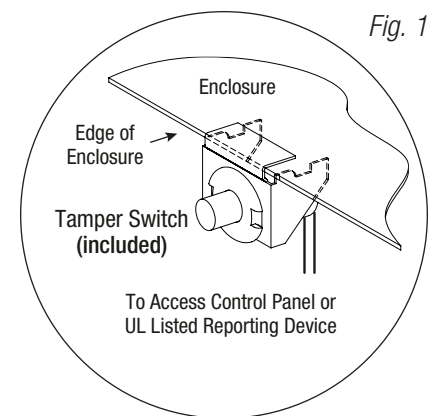


## T1KE34DV: Configuration of Kisi Pro Controllers:

1. Fasten mounting magnets (provided) to Kisi Pro Controllers with screws and spacers (provided) using the controllers' mounting holes (Fig. 2, pg. 3).
2. Attach mounting magnets to TLU1 in the approximate position as shown below (Fig. 2, pg. 3).  
**Note:** Kisi Pro Controllers should be properly oriented.  
Please make sure that they are mounted correctly, as shown in Fig. 2 below.
3. Fasten TLU1 backplane to Trove1 enclosure utilizing hardware (provided).

### Access Controller Position Chart for the Following Models:

| Kisi           | Pem Mounting |
|----------------|--------------|
| Pro Controller | (A)          |

Fig. 2 - T1KE34DV Configuration

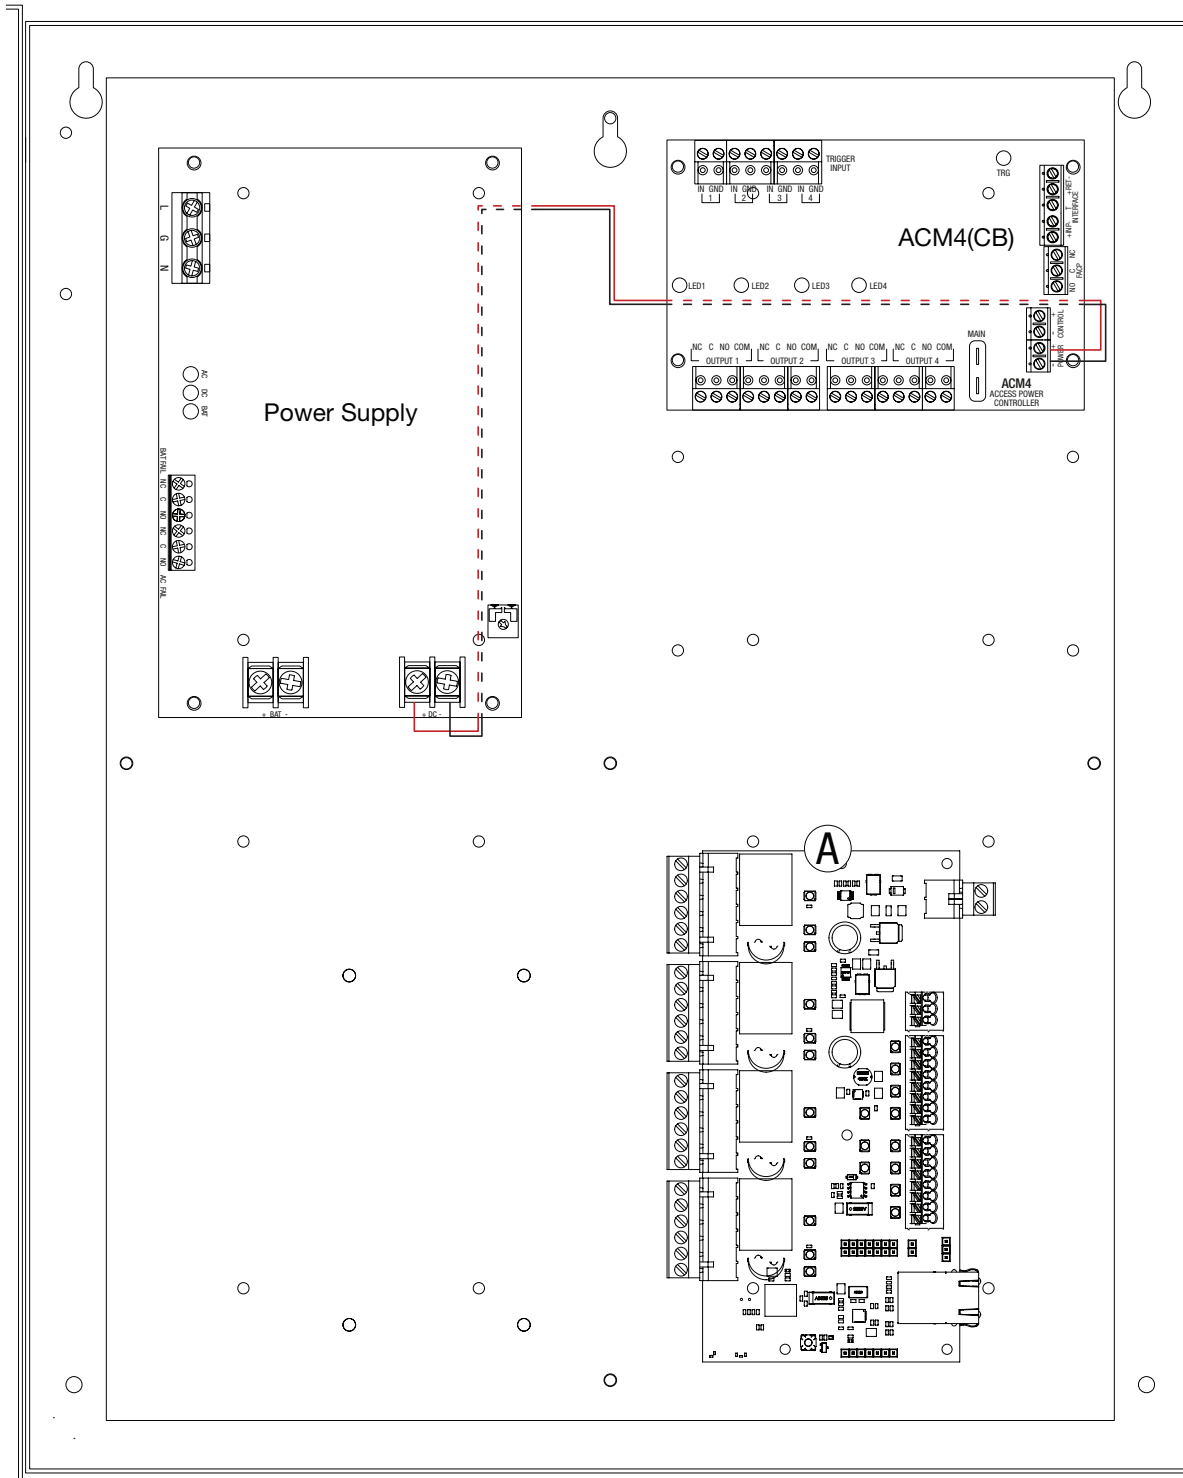


## T1KE38DV: Configuration of Kisi Pro Controllers:

1. Fasten mounting magnets (provided) to Kisi Pro Controllers with screws and spacers (provided) using the controllers' mounting holes (*Fig. 3, pg. 4*).
2. Attach mounting magnets to TLU1 in the approximate position as shown below (*Fig. 3, pg. 4*).  
**Note:** Kisi Pro Controllers should be properly oriented.  
Please make sure that they are mounted correctly, as shown in *Fig. 3* below.
3. Fasten TLU1 backplane to Trove1 enclosure utilizing hardware (provided).

### Access Controller Position Chart for the Following Models:

| Kisi           | Pem Mounting |
|----------------|--------------|
| Pro Controller | (A)          |

Fig. 3 - T1KE38DV Configuration

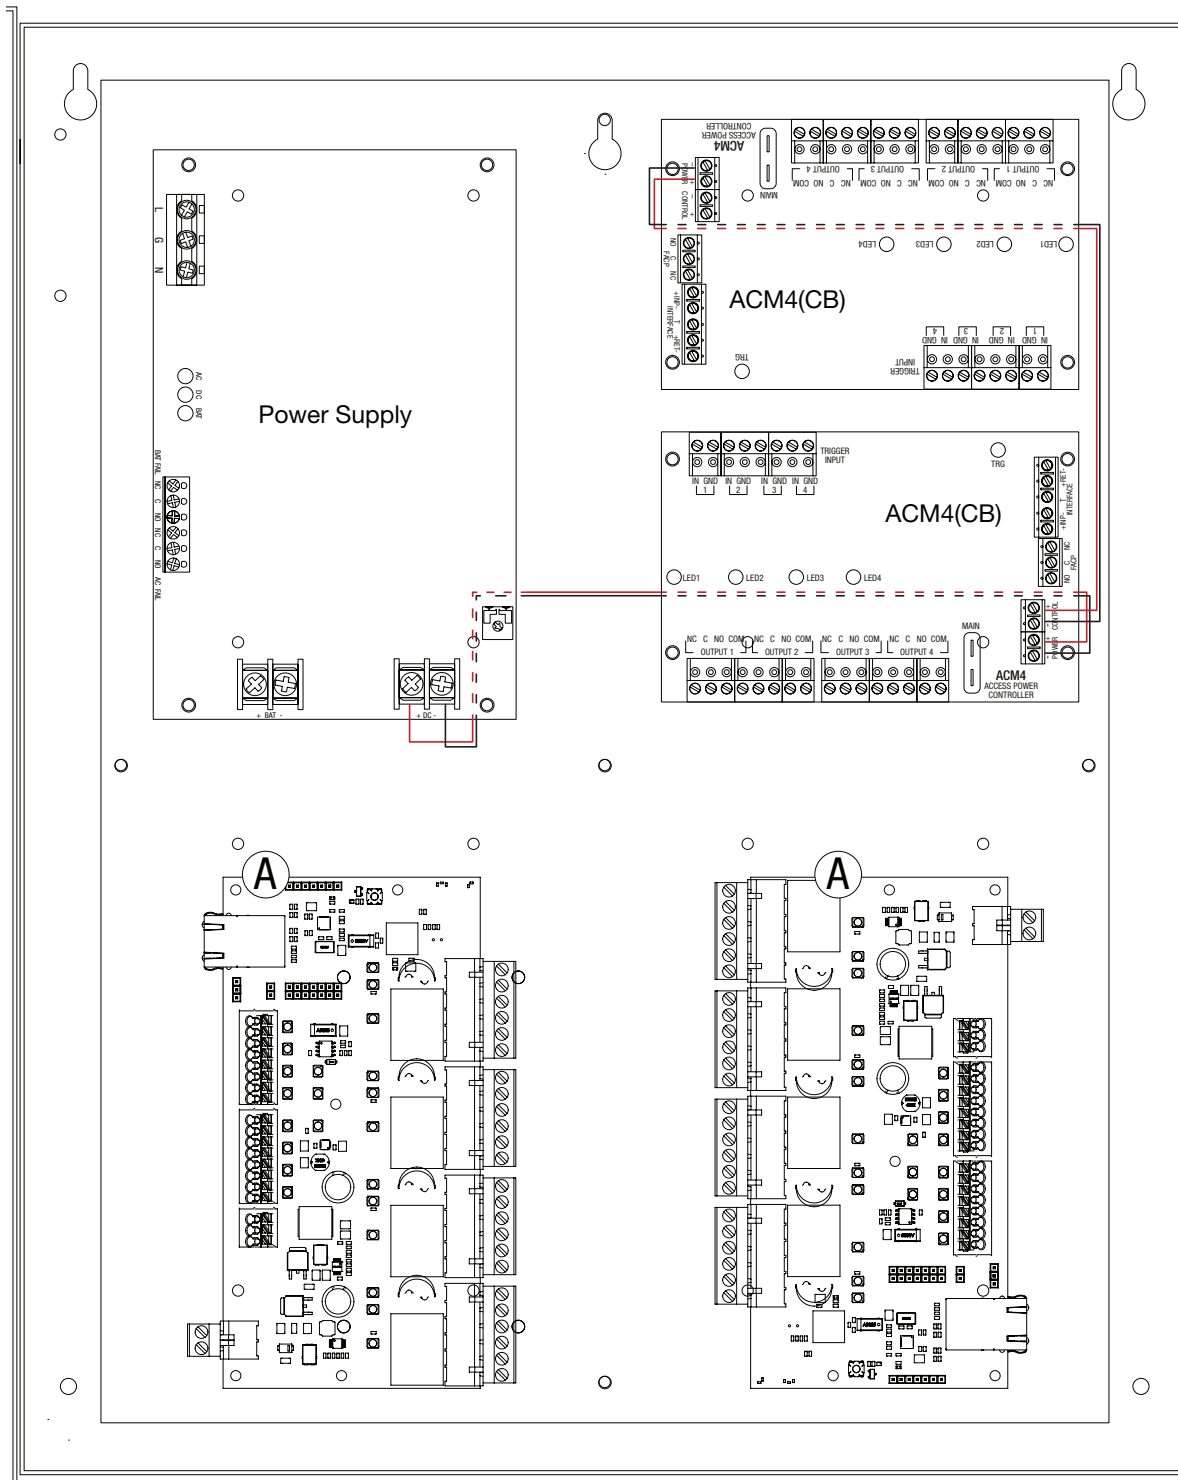


## T2KE3316DV: Configuration of Kisi Pro Controllers:

1. Fasten mounting magnets (provided) to Kisi Pro Controllers with screws and spacers (provided) using the controllers' mounting holes (Fig. 4, pg. 5).
2. Attach mounting magnets to TLU2 in the approximate position as shown below (Fig. 4, pg. 5).  
**Note:** Kisi Pro Controllers should be properly oriented.  
Please make sure that they are mounted correctly, as shown in Fig. 4 below.
3. Fasten TLU2 backplane to Trove2 enclosure utilizing hardware (provided).

### Access Controller Position Chart for the Following Models:


| Kisi           | Pem Mounting |
|----------------|--------------|
| Pro Controller | (A)          |

Fig. 4 - T2KE3316DV Configuration

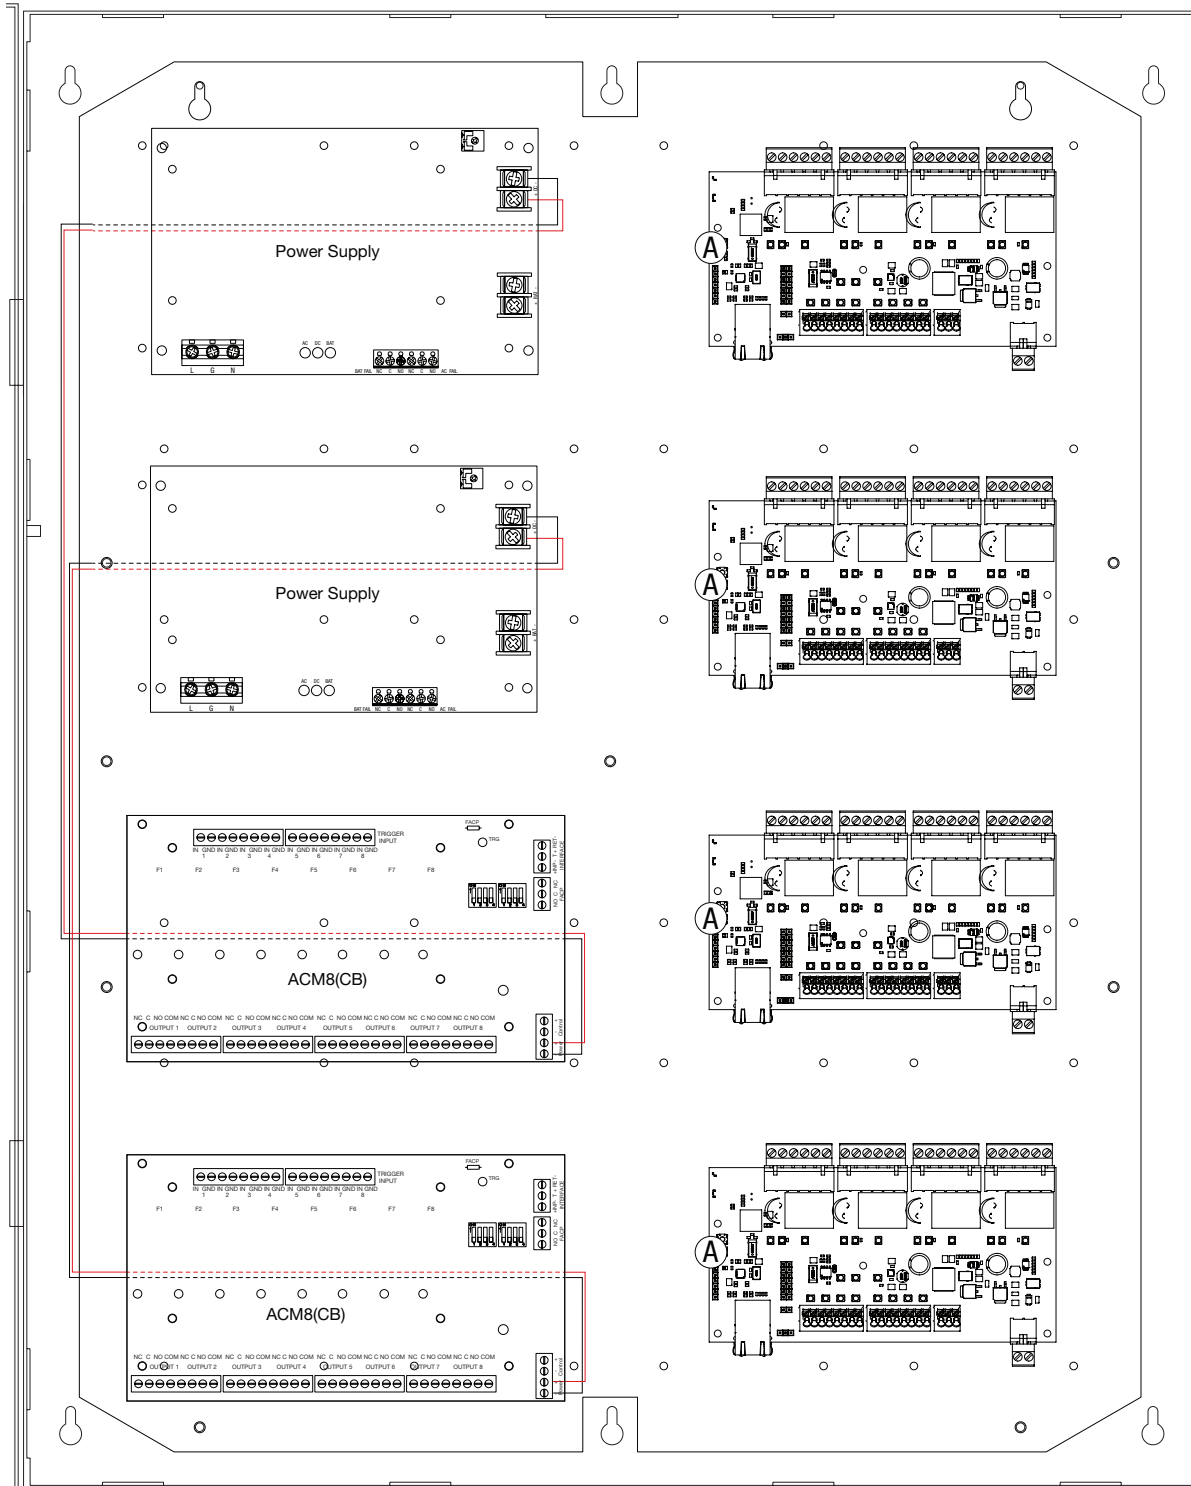


# T1KE34DV/T1KE38DV Enclosure Dimensions (H x W x D approximate):

18" x 14.5" x 4.625" (457mm x 368mm x 118mm)

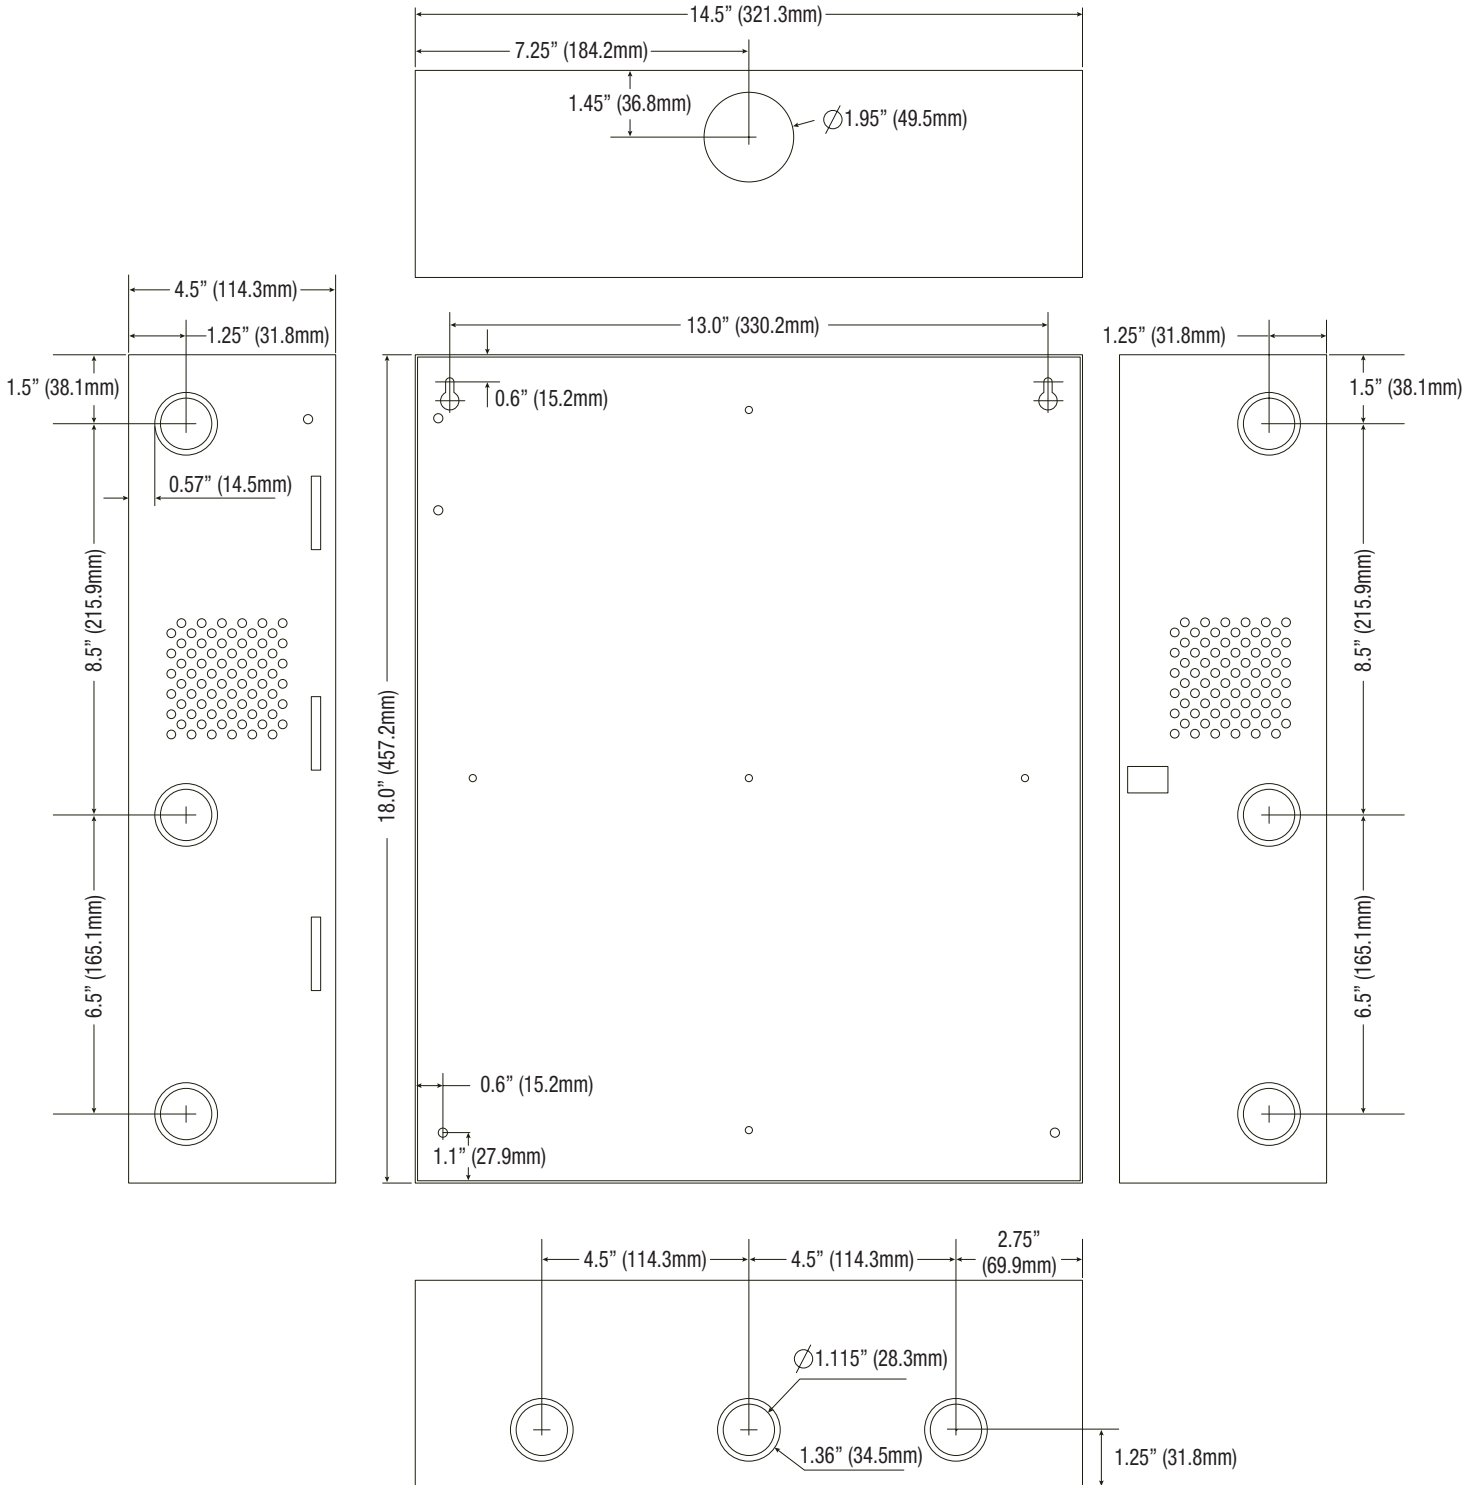

## T2KE3316DV Enclosure Dimensions (H x W x D approximate):

27.25" x 21.5" x 6.5" (692.2mm x 552.5mm x 165.1mm)

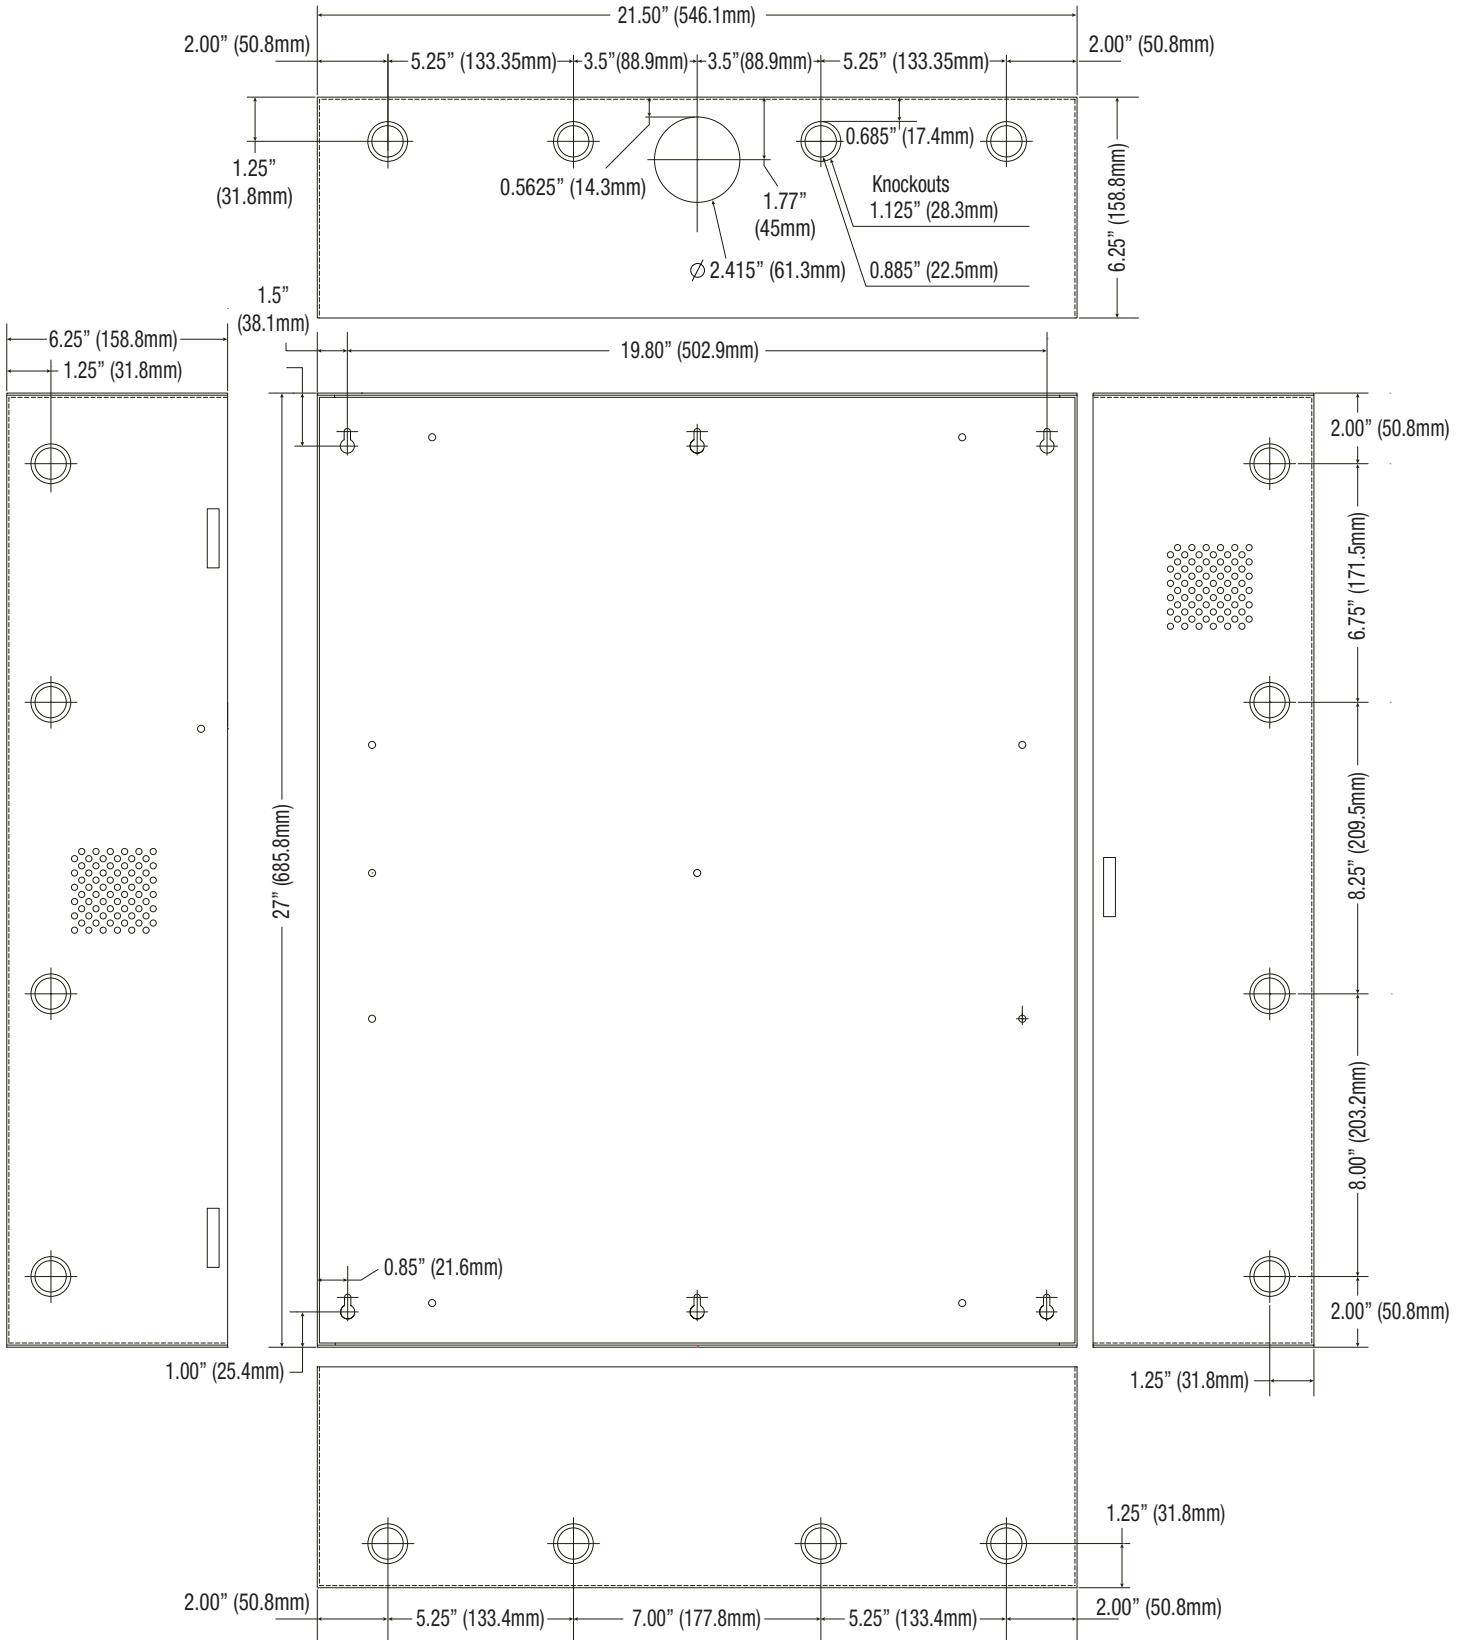

## Notes:

Altronix is not responsible for any typographical errors.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056  
web site: [www.altronix.com](http://www.altronix.com) | e-mail: [info@altronix.com](mailto:info@altronix.com) | Lifetime Warranty.  
IIT1KE34DV/38DV / T2KE3316DV

L27U

